




SAFE-T-SPAN® PULTRUDED INDUSTRIAL GRATING SIZES & OPTIONS


All products are provided with tie bars at 6" on center. Standard walking surface is slip-resistant coarse grit.
Stock resins are ISOFR and VEFR in yellow or gray.

1" Deep Industrial Grating

1" Deep, I-6010

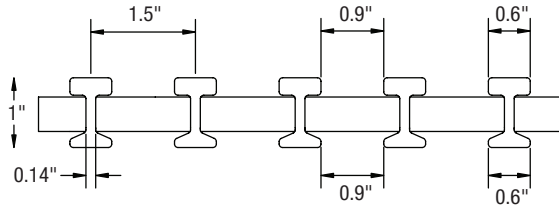


1" Deep, I-4010 ADA Compliant

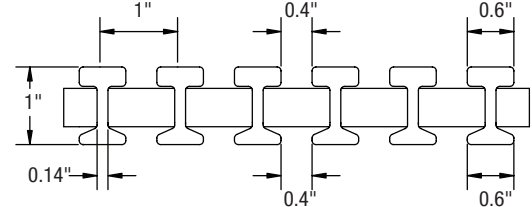


Part No.	Depth	Load Bar Spacing	Widths	Lengths	Weight (psf)	Open Area
I-6010	1"	1.5" O.C.	36" or 48"	Up to 24'-0"	2.6#	60%
I-4010	1"	1" O.C.	36" or 48"	Up to 24'-0"	4.1#	40%

1-1/2" Deep Industrial Grating

1-1/2" Deep, I-6015

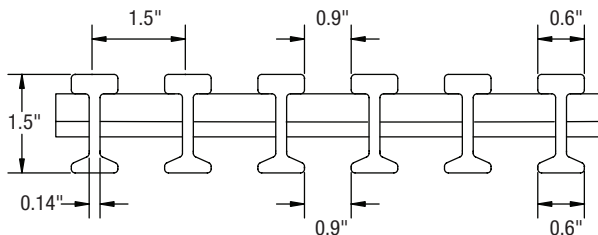


1-1/2" Deep, I-4015 ADA Compliant

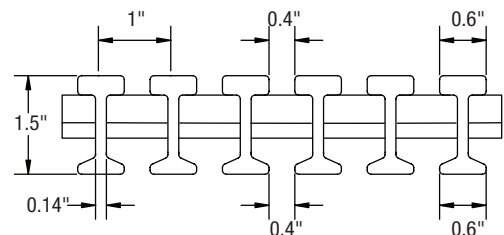


Part No.	Depth	Load Bar Spacing	Widths	Lengths	Weight (psf)	Open Area
I-6015	1-1/2"	1.5" O.C.	36" or 48"	Up to 24'-0"	2.8#	60%
I-4015	1-1/2"	1" O.C.	36" or 48"	Up to 24'-0"	4.1#	40%

2" Deep Industrial Grating

2" Deep, T-5020

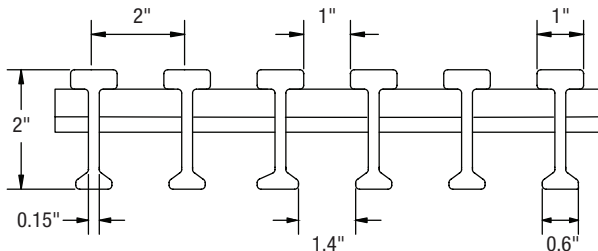

2" Deep, T-3320 ADA Compliant

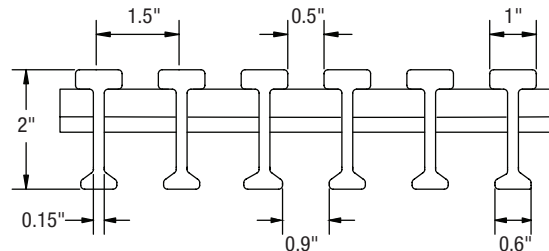

Part No.	Depth	Load Bar Spacing	Widths	Lengths	Weight (psf)	Open Area
T-5020	2"	2" O.C.	36" or 48"	Up to 24'-0"	3.1#	50%
T-3320	2"	1-1/2" O.C.	36" or 48"	Up to 24'-0"	4.0#	33%




GRATING PACIFIC

AQUA GRATE® FRP PEDESTRIAN GRATING


Tie bar spacing is at 6" on center. Standard walking surface is Aquagrit slip-resistant fine grit.
Standard colors are dark gray bar w/ light gray top coat.

1" and 1-1/2" Deep Pedestrian Grating

1" Deep, T-1210 ADA Compliant 

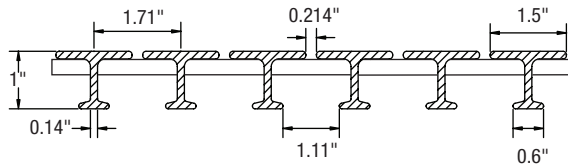

1-1/2" Deep, T-1215 ADA Compliant 

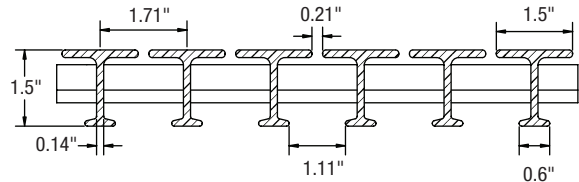


Part No.	Depth	Load Bar Spacing	Widths	Lengths	Weight (psf)	Open Area
T-1210	1"	1.71" O.C.	36" or 48"	Up to 24'-0	2.6#	12%
T-1215	1-1/2"	1.71" O.C.	36" or 48"	Up to 24'-0	3.6#	12%

SATE-T-SPAN® FRP PEDESTRIAN GRATING


Tie bar spacing is at 6" on center. Standard walking surface is Aquagrit slip-resistant fine grit. Stock resins are ISOFR or VEFR dark gray.

1" Deep Pedestrian Grating

1" Deep, T-3810

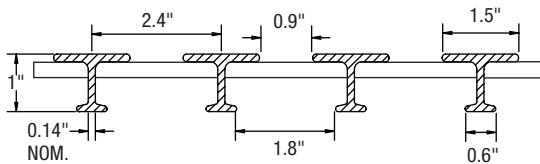


1" Deep, T-2510 ADA Compliant 

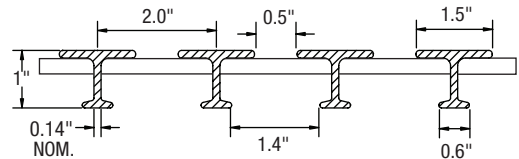


Part No.	Depth	Load Bar Spacing	Widths	Lengths	Weight (psf)	Open Area
T-3810	1"	2.4" O.C.	36" or 48"	Up to 24'-0	1.9#	38%
T-2510	1"	2" O.C.	36" or 48"	Up to 24'-0	2.3#	25%

1-1/2" Deep Pedestrian Grating

1-1/2" Deep, T-3815

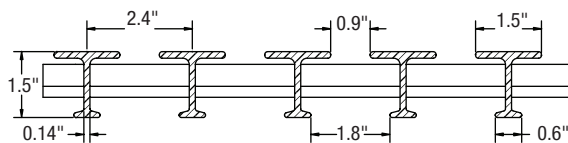

1-1/2" Deep, T-2515 ADA Compliant 

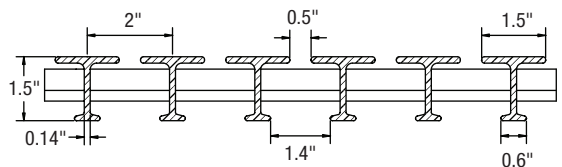

Part No.	Depth	Load Bar Spacing	Widths	Lengths	Weight (psf)	Open Area
T-3815	1-1/2"	2.4" O.C.	36" or 48"	Up to 24'-0	2.7#	38%
T-2515	1-1/2"	2" O.C.	36" or 48"	Up to 24'-0	3.2#	25%